



TYPICAL SECTION
 44' TO 48' ASPHALTIC CONCRETE PAVING
 (LIME STABILIZED BASE)
 ARTERIAL STREET

SEE CURB & GUTTER DETAIL

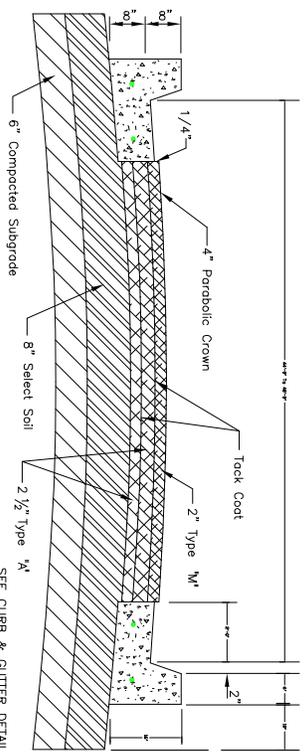

TYPICAL SECTION
 44' TO 48' ASPHALTIC CONCRETE PAVING
 (SELECT SOIL BASE)
 ARTERIAL STREET

SEE CURB & GUTTER DETAIL

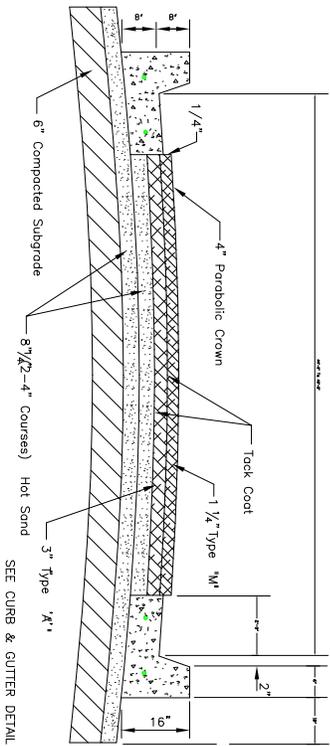

TYPICAL SECTION
 44' TO 48' ASPHALTIC CONCRETE PAVING
 (HOT SAND ASPHALT BASE)
 ARTERIAL STREET

SEE CURB & GUTTER DETAIL

- GENERAL NOTES
1. SEE SUBDIVISION REGULATIONS FOR STREET WIDTH.
 2. ALL SECTIONS USING SELECT SOIL SHALL HAVE THE TOP 6" OF SUBGRADE COMPACTED TO 95% OF THE SELECT SOIL.
 3. ADVANCE NOTIFICATION (4 HOURS MINIMUM) SHALL BE REQUIRED PRIOR TO TAKING ANY DENSITY TEST. NOTIFICATION SHALL BE MADE TO THE OFFICE OF THE ENGINEER.
 4. UNLESS OTHERWISE SHOWN, A MINIMUM OF 95% OF EACH DENSITY TAKEN.
 5. 2 ADDITIONAL TESTS SHALL BE PERFORMED FOR UNDERPAVING TESTS ON TRANSVERSE CROSSINGS UNLESS OTHERWISE NOTED ON THE PLANS.

6. UNLESS OTHERWISE REQUIRED, THE FOLLOWING TESTING FOLLOWED:
 - A. SOIL CLASSIFICATION - 1200 SQ. YDS. OF MATERIAL
 - B. STANDARD PROCTOR - AS NECESSARY TO DETERMINE DENSITY.
 - C. SUBGRADE DENSITY - A MAXIMUM OF EVERY 1200 SQ. YDS. OR NECESSARY TO DETERMINE UNIFORMITY OF EACH 6" INCH LAYER AT MAXIMUM
 - D. EMPERKMENT DENSITY - OF EVERY 1200 SQ. YDS.
 - E. TRENCH UNDER PAVING - SERVICE AREA OR AS NECESSARY TO DETERMINE EVERY 200 LF. OF TRENCH OR ANY TRANSVERSE WORKING CROSSINGS OCCUR UNDER A SINGLE PROJECT. ONE TEST FOR EACH 3 CROSSINGS IS REQUIRED.

COMMUNITY PLANNING & DEVELOPMENT

STANDARD TYPICAL SECTIONS
 ASPHALTIC CONCRETE PAVING

APPROVED BY: _____ DATE: _____ DRAWN BY: S-2