



44' TO 48' ASPHALT WIDENING AND RESURFACING
(LIME STABILIZED BASE)

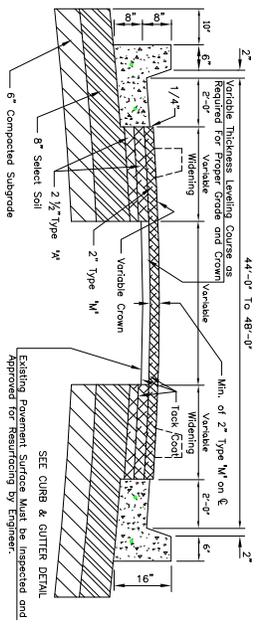

44' TO 48' ASPHALT WIDENING AND RESURFACING
(SELECT SOIL BASE)

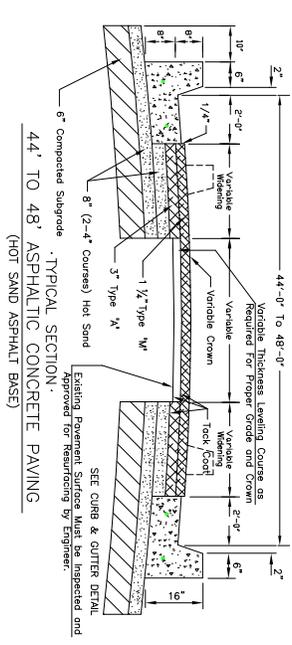

44' TO 48' ASPHALTIC CONCRETE PAVING
(HOT SAND ASPHALT BASE)

- GENERAL NOTES
- SEE SUBDIVISION REGULATIONS FOR STREET WIDTH.
 - ALL SECTIONS USING SELECT SOIL SHALL HAVE THE TOP 6" OF SUBGRADE COMPACTED TO 95% OF THE SELECT SOIL.
 - ADVANCE NOTIFICATION (4 HOURS, MINIMUM) SHALL BE REQUIRED PRIOR TO TAKING ANY DENSITY TEST. NOTIFICATION SHALL BE MADE TO THE OFFICE OF THE ENGINEER.
 - UNLESS OTHERWISE SHOWN, A MINIMUM OF 95% OF EACH DENSITY TAKEN.
 - 1. ADDITIONAL TEST SHALL BE PERFORMED FOR UNDER PAVEMENT TEST ON TRANSVERSE CROSSINGS.
 - 2. ADDITIONAL TEST SHALL BE PERFORMED FOR TRANSVERSE CROSSINGS.
 - THE CENTERLINE SHALL BE THE SECTION LINE UNLESS OTHERWISE NOTED ON THE PLANS.
 - UNLESS OTHERWISE REQUIRED, THE FOLLOWING TESTING FOLLOWED:
 - A. SOIL CLASSIFICATION - 1200 SQ. YDS. OF MATERIAL OR AS NECESSARY TO DETERMINE UNIFORMITY OF MATERIAL.
 - B. STANDARD PROCTOR - INFORMATION FOR REQUIRED DENSITY.
 - C. SUBGRADE DENSITY - DENSITY, UNIFORMITY OF COMPACTION, OR NECESSARY TO DETERMINE UNIFORMITY OF COMPACTION.
 - D. EMBANKMENT DENSITY - EACH 6" INCH LAYER AT EACH 50' VERTICAL INTERVAL.
 - E. TRENCH UNDER PAVING - SERVICE AREA OR AS NECESSARY TO DETERMINE UNIFORMITY OF COMPACTION.
- NOTE: MORE CROSSINGS OCCUR WHEN THREE OR MORE CROSSINGS OCCUR AT ONE POINT FOR EVERY ONE HUNDRED FEET. TRANSVERSE CROSSINGS IS REQUIRED.

COMMUNITY PLANNING & DEVELOPMENT

STANDARD TYPICAL SECTIONS
ASPHALTIC CONCRETE PAVING

APPROVED BY: _____ DATE: _____

DRAWN BY: _____ DATE: _____

SCALE: S-5